

Cut-off relay

GW0002

EN Operating Instructions

EN

1. General information

The cut-off relay **GW0002** allows the connection of two motors with mechanical end stop to only one shutter or awning control unit.

The complete separation of load and control circuits makes it possible.


Warning: A parallel connection of motors without cut-off relay is not permitted. It leads to a malfunction of the motors that are directly connected to each other.

This can cause severe system failures.

2. Assembly

The cut-off relay **GW0002** is equipped with the IP protection class 64 and thus suitable for indoor and outdoor operation.

3. Connection diagram

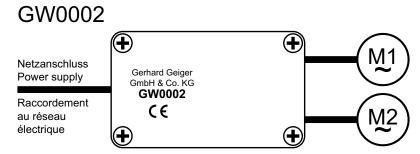

4. Specifications GW0002

Supply voltage	230 V (+/-10%) / 50 Hz
Protective conductor (PE)	Connect PE directly to the motor
Switching capacity (resistive load)	1250 W
Working cycle	Unlimited
Protection class	IP 64
Dimensions	approx. 120 x 80 x 35 mm

Subject to technical modifications

CE

5. Declaration of Conformity

We herewith explicitly declare that this product complies with the essential requirements and relevant directives. It is authorised for use in all EC member states and in Switzerland without any need of prior registration. The Declaration of Conformity concerning this product is available on our website: www.geiger.de.

6. Notes on waste disposal

Recycling of packaging materials

In the interest of environmental protection, please contact your local government's recycling or solid waste management department to learn more about the services it provides.

Waste disposal of electric and electronic equipment

Electronic equipment or batteries cannot be discarded along with the normal household waste. Keep for more information on the recycling and disposal methods envisaged by the local regulations in your area.

For technical questions, please call our service team at: +49 (0) 7142 938 333. They will be happy to assist you.



Gerhard Geiger GmbH & Co. KG

Schleifmühle 6 | D-74321 Bietigheim-Bissingen T +49 (0) 7142 9380 | F +49 (0) 7142 938 230 info@geiger.de | www.geiger.de



EN