


Setting switch

M56K144 with Hirschmann STAK3 (D)

M56F150 with Hirschmann STAK3 (CH)

M56F151 with service terminals (D)

Adjusting instructions

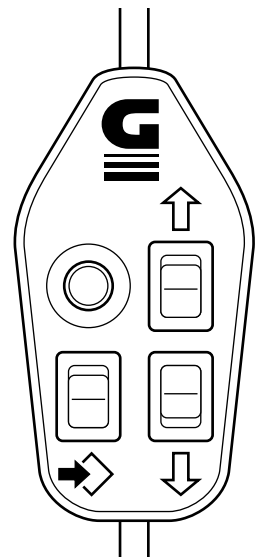

Declaration of conformity

This product complies with the essential requirements of the directive 2004/108/EG. It is authorised for use in all EC member states and in Switzerland without any need of prior registration. The Declaration of Conformity concerning this product is available on our website: www.geiger-antriebstechnik.de.

EN

Notes on waste disposal

Recycling of packaging materials

In the interest of environmental protection, please contact your local government's recycling or solid waste management department to learn more about the services it provides.

Waste disposal of electric and electronic equipment

Electronic equipment or batteries cannot be discarded along with the normal household waste. Keep for more information on the recycling and disposal methods envisaged by the local regulations in your area.

For technical questions, please call our service team at: +49 (0) 7142 938-300. They will be happy to assist you.

Setting switch ...

...for Venetian blind motors (GJ56..e) and the motors MODULARline Easy (GR45..E01), SOLIDline Easy (GU45..E01), SoftPlus/SoftZero/SoftPlus-DG (GU45..E02), SoftReverse (GU45..E06) and SoftLock (GU45..E07).


Connection of the setting switch

To realise the required setting procedures, the setting switch M56K144/M56F150/M56F151 must be used. If necessary do use the adaptation cable with the service terminals M56B265.




The work with the service terminals may be accomplished only by an electrical specialist.

Connection with setting switch M56K144/M56F150 (when required with adaptation cable M56B265)

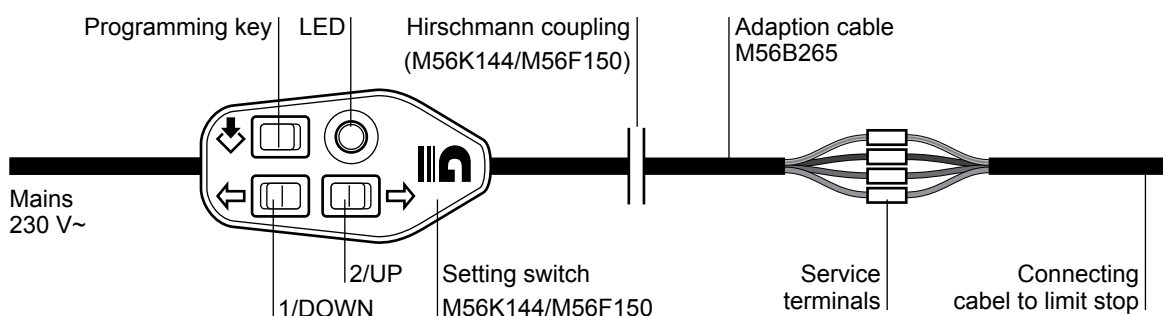

Connection with setting switch M56F151 with service terminals

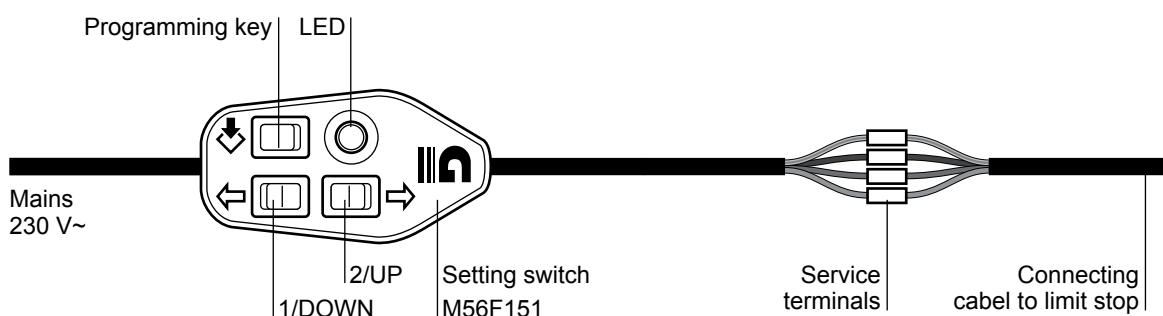

SECURITY NOTE: This setting cable is protected against damage with a fuse type T 1,6 A 250V. This fuse must be replaced by a fuse of the same type. Other types of fuse might damage the setting cable.

Please disconnect the device before opening the housing. The device may only be opened by a qualified electrician.


EN

GEIGER motors GJ56..e, MODULARline and SOLIDline



Note: please refer to the installation and operating instructions of the respective motors to adjust the end positions and to modify the power levels.

For technical questions, please call our service team at: +49 (0) 7142 938-300. They will be happy to assist you.



GEIGER
Antriebstechnik

Gerhard Geiger GmbH & Co. KG
Schleifmühle 6
D-74321 Bietigheim-Bissingen
Telephone: +49 (0) 7142 938-0
Telefax: +49 (0) 7142 938-230
www.geiger-antriebstechnik.de
info@geiger-antriebstechnik.de