

Product Data Sheet

GEIGER-SOLIDline SoftPlus-Qi – The first Plug & Play awning motor



Contents

Introduction	1
Problem and solution	1
Design and features.....	1
Functions.....	2
Quick installation guide.....	3
Motor series SOLIDline.....	3
SOLIDline motor heads.....	3
Technical data.....	4

Introduction

The installation of awning motors is now considerably simplified with the new SoftPlus-Qi electronic limit stop from GEIGER.

The well-known and reliable SoftPlus technology has been further simplified. No special setting cable, no special skills required - GEIGER-SOLIDline SoftPlus-Qi.

Problem and solution

Assembly efficiency

PROBLEM:

The commissioning of awnings is often complicated and very time consuming. A special setting cable is usually required. The customer has no possibility to modify himself the set end stops, if necessary.

SOLUTION:

The GEIGER-SoftPlus-Qi ensures an extremely fast and efficient programming: precise and safe positioning. Since no setting cable is required, the customer may adjust himself the awning position at any time.

Design and features

The GEIGER SoftPlus-Qi meets several market requirements in a quite unusual way:

- ▶ Installation with automatic positioning
- ▶ Installation with Plug & Play
- ▶ no setting cable is required

... a well-conceived system: GEIGER-SOLIDline SoftPlus-Qi

GEIGER-SoftPlus-Qi Range of application

- Cassette awnings

Made by GEIGER

GEIGER relies on Germany as production location: the **GEIGER SOLIDline**, like all GEIGER motors, is developed and produced in Germany. This situation allows an optimal combination of R & D, manufacturing processes and quality management.

Our clients benefit from:

- Low noise motors
- Low energy consumption, a big plus factor today
- Low heating of the engine and therefore an unusual long running time



Functions


Plug & Play

The **GEIGER-SoftPlus-Qi** simplifies the installation significantly. The motor is delivered in the programming mode. After assembly, move the awning to the required end position and close the awning until the motor shuts down through a very sensitive torque cut-off. Done !

Detection System

GEIGER awning motors are able to detect the position of the cloth during operation. By approaching the point of maximum extension, the motors run at full power. Near closing point, they reduce their power accordingly.

You will notice that the GEIGER motors are particularly powerful around the maximum point of extension and particularly sensitive around closing point. This combination offers significant advantages to all awning manufacturers.

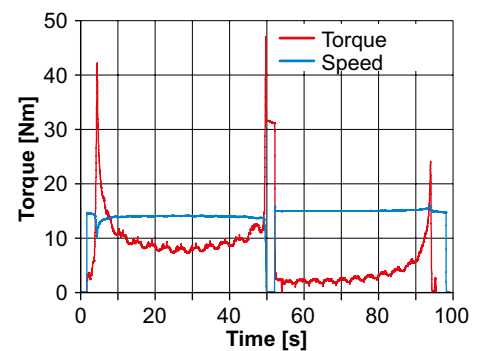

Torque diagram by extension / retraction of a folding arm awning

Length compensation system

The **GEIGER-SoftPlus-Qi** has a length compensation system which guarantees that the final external position remains unchanged even if the cloth length is modified.

In particular regarding covered terraces, pergolas or sunrooms, this system offers high security and reliability. It also avoids customer assistance for a new setting of the end stops.

Setting of the end stops

The programming of the lower end position is made via free positioning. The upper end position is programmed automatically via a very sensitive torque limit.

Controlling the end stops

The control of the upper end position is realized via a very exact torque limit during each cycle. Changes in the cloth length are detected and compensated if necessary.

We can guarantee that the outer end position remains unchanged.

Obstacle detection

The **GEIGER-SoftPlus-Qi** has an obstacle detection in UP direction.


Quick installation guide

Programming the end positions

- ❶ Connect the connecting cable of the motor to the control switch.
- ❷ Move the awning to the required lower end position. Any adjustment can be realized here.
- ❸ Move the awning to the upper position without any interruptions until the motor shuts down. (torque detection). The programming procedure is then completed and the motor returns to normal operating mode.

Change the end positions

- ❶ Extend the awning and activate the learning mode. For this purpose retract the awning for 1 second, wait 5 seconds, extend the awning for 1 second, wait 5 seconds, retract the awning for 1 second, wait 5 seconds, retract again the awning for 1 second and wait 5 seconds.



The motor always starts with a jerk when the learning mode is activated.

- ❷ Move the awning to the new lower end position. Any adjustment can be realized here.
- ❸ Move the awning to the upper end position without interruptions until the motor automatically shuts down. (torque detection). The programming procedure is then completed and the motor returns to normal operating mode.

Note: the motor can be programmed with any setting cable which allows a simultaneous UP and DOWN command. The learning mode is activated by pressing simultaneously the UP and DOWN keys.

Motor series SOLIDline

The GEIGER SOLIDline motors have been developed for the specific needs of the sun protection industry and the craft trade. The motor is characterized by:

- **Low noise emissions and extremely smooth operation**
- **Low power consumption and reduced operating costs**
- **Long service life and high reliability**

SOLIDline motor heads

All **SOLIDline** motors are available with four different motor heads:

- The extremely narrow **KS motor head** made of plastic is best suited for all GEIGER fixation systems in order to provide quick and easy assembly/disassembly with low space requirement.
- The extremely thin **COM motor head** offers the possibility to optimize the fabric width for screens and facade awnings. The sun protection system can be designed independently from the selected drive. Light slots should be minimized or avoided altogether – as in ZIP screens.
- The **SOC motor head** is optimally designed for installation with star shaped fixation systems. The motor head is universally applicable in the rolling shutter area also together with traditional fastening systems.
- With the **SIL motor head** GEIGER has found a new solution in order to prevent noise emissions. Due to special bearings with rubber inserts noise and vibration are not transmitted in the system and the masonry.



SOLIDline-KS



SOLIDline-COM



SOLIDline-SOC



SOLIDline-SIL

Technical data

Technical data of tubular motor SOLIDline-KS (GU45..)


	GU4510	GU4520	GU4530	GU4540	GU4550 ³⁾
Voltage	230V~/50Hz				
Current	0,47 A	0,63 A	0,8 A	1,0 A	1,0 A
Cos Phi (cosφ)	>0,95				
Inrush current (factor)	x 1,2				
Power	105 W	140 W	180 W	220 W	220 W
Torque	10 Nm	20 Nm	30 Nm	40 Nm	50 Nm
Speed	16 rpm	16 rpm	16 rpm	16 rpm	12 rpm
Protection class	IP 44				
Total length¹⁾	516,5 mm	546,5 mm	566,5 mm	586,5 mm	586,5 mm
Operating mode	S2 4 min	S2 5 min	S2 4 min	S2 4 min	S2 4 min
Sound pressure level²⁾	39 dB(A)	41 dB(A)	41 dB(A)	43 dB(A)	-
Diameter	45 mm				
Weight	approx 1,90 kg	approx 2,20 kg	approx 2,40 kg	approx 2,70 kg	approx 2,70 kg
Storage temperature/Humidity	T = -15°C .. +70°C / dry and non-condensing place				

¹⁾ SOLIDline-COM: + 3,5 mm / SOLIDline-SOC: + 3 mm / SOLIDline-SIL: ± 0 mm (without trunnion)

²⁾ The average sound pressure level data are intended for guidance only. The values were determined by GEIGER at a distance of 1 m, with a hanging motor at idle speed and averaged over 10 seconds. There is no reference to any specific test standard.

³⁾ GU4550 is only available with motor head KS and SOC and CE-certification.

Subject to technical modifications. Please find information to the ambient temperature range of our GEIGER motors under www.geiger.de

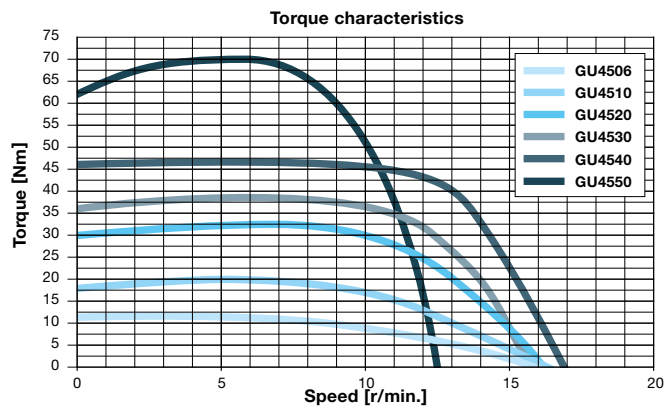

The name GEIGER Antriebstechnik is synonymous worldwide for drive solutions in the sun protection area.

Today we are with more than 300 employees one of the leading manufacturers of mechanical and electrical drives for Venetian blinds, awnings and rolling shutters.

GEIGER is a well-known, mid-sized company which offers worldwide drive components for the sun protection systems.